

FAULT SNIFFER 2

Simple location of cable faults
in underground low voltage networks







- Consumers/households can remain connected to the power grid
- Graphical display of the gas concentration
- Two-sensor technology detects natural gases and warns you
- Operating time > 10h with one battery charge
- **Optional:**
Backpack with integrated vacuum probe system

DESCRIPTION

Save time and money. With the Fault Sniffer 2 you can go to cable fault location yourself. Find cable faults quickly and safely without the use of service providers or a cable test van.

Most cable faults result in burns of the cable sheath. The resulting gases are sucked in and detected by the vacuum technology of Fault Sniffer 2. The data is evaluated in real time and gives you a graphical representation of the combustion gas concentration.

The intelligent two-sensor technology also detects natural gases and differentiates them from combustion gases. This prevents misinterpretations.

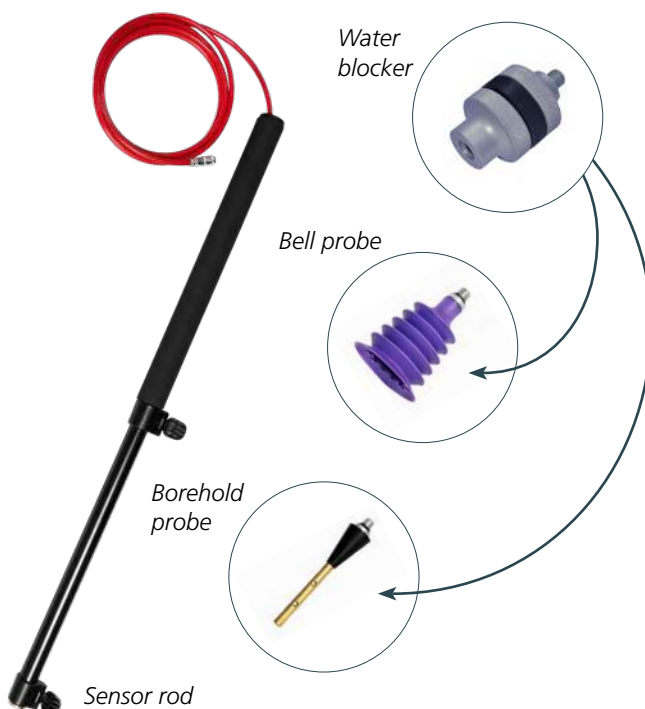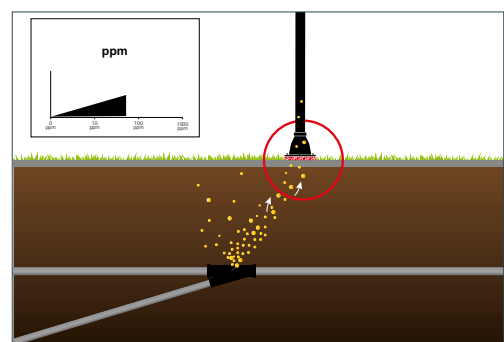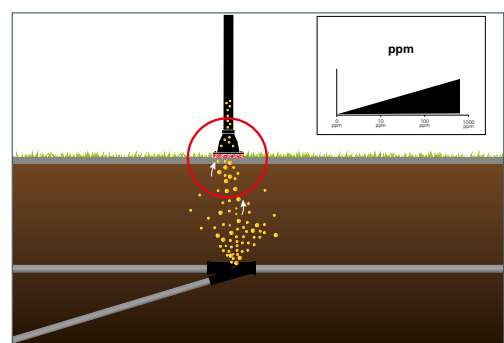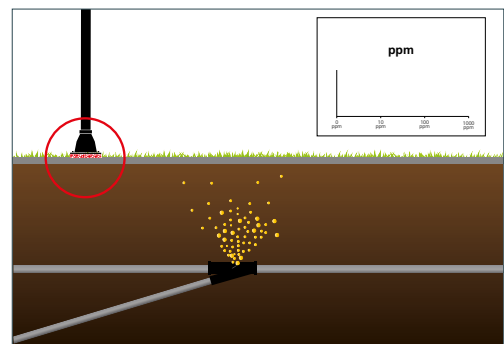

FAULT SNIFFER 2

Simple location of cable faults in underground low voltage networks

TECHNICAL DATA

Dimensions	Approximately 192 x 100 x 87 mm (without gas inlet screw)
Weight	Approximately 1150 g
Display	LCD, 240 x 160 pixels, display with backlight for the logarithmic display of measured value and bar graph
Power supply	Li-Ion battery pack, nominal voltage: 3.6 volt, nominal capacity: 6700 mAh, charging voltage 12 V/1 A DC re-chargeable
Charging	Via charger with 230 V AC or 12 V DC via integrated charging socket
Pump	Integrated, flow rate approximately 40 l/h
Operating time	> 10 hours
Operating temperature	-10°C to +50°C
Degree of protection	IP 42
Connections	1 nipple Rectus Series 20
Filter	(1) Hydrophobic filter with double membrane and dust filter at the gas inlet (2) Hydro filter and dust filter in the water blocker
Interface	Bluetooth®
Data memory	> 2,000,000 measured values
Carrying technique	Attachment for Tenax waist belt
Sensors	Dual sensor for the detection of gases that are characteristic of cable faults
Coupling sensor	7.5 mm borehole probe or bell jar
Operating principle	Semiconductor and electrochemical
Display range	Up to approximately 1000 ppm



ORDER INFORMATION

Description	Order no.
Fault Sniffer 2 Set Consisting of: Gas detector, power supply unit 230 V, 12 V charging cable, carrying strap, transport case, water-blocker, multi-probe set and replacement filters for water-blocker and gas-inlet in separate carton.	1012974
Optional:	
Fault Sniffer 2 extension set vacuum pump system with backpack	1012956
Trolley for vacuum pump system VSS 15	90033474
Vehicle charging lead vacuum pump system VSS 15	90041556
Replacement filter set Consisting of: 3 Efi1 filters and 30 dust filters for gas-inlet, 8 hydrophobic and 80 dust filters for water-blocker	90039408
1 pack (400 pieces) Bitumen plugs	118302678

* The information in this document is subject to change without notice and should not be construed as a commitment by Megger Germany. Megger Germany assumes no responsibility for any errors that may appear in this document.

SALES OFFICE

Megger Germany GmbH
Dr.-Herbert-lann-Str. 6
96148 Baunach
Germany
T +49 9544 68-0
E team.international@megger.com

FAULTSNIFFER2_DS_EN_V04a

www.megger.com
ISO 9001
The word 'Megger' is a registered trademark.

Megger[®]